dci

Industrial & Commercial Flooring Solutions

TOUGH FLOORS FOR TOUGH ENVIRONMENTS

California Contractors License # 763816

Epoxies Urethanes MMA's

DCI has the right tools, the right products, the right people and the right price!

www.dciflooring.com

See our website for info or call us with your questions/bids at 877.225.2549

DCI offers a complete line of floor and wall coatings materials as well as the most professional installation available. These high performance coating systems meet the ever increasing demands of the food processing and manufacturing industry. When used in new construction or renovation of an existing floor, polymer flooring systems will add value and quality to your facility. Your customers will appreciate the effort you have put into your facility. A DCI seamless floor is functional, safe and impressive to both your clients and your employees.

Let DCI be the choice for your next flooring project!

EPOXY FLOORING SYSTEMS

- **Multiple coats possible**
- **Traffic ready in 24 hours**
- **Resists hot water up to 160 degrees**
- **Excellent chemical resistance**
- **Requires 28 days of concrete cure time**
- **Takes up to 3 PSI moisture**
- **High sheen or glossy finish**
- **Low odor**
- **Flexible membrane up to 150 elongation available**

URETHANE FLOORING SYSTEMS

- **One stop flooring systems up to 3/8”**
- **Resists hot water up to 240 degrees and is chemical resistant**
- **Anti-microbial built into the system**
- **Breathable system eliminates most moisture**
- **Very minimal odor**
- **Traffic ready in 5-12 hours**
- **Top coatings optional**
- **Available in solid colors, quartz and flake**
- **Requires 7-10 days of cure time**
- **Can be applied over damp or dry concrete**

Heavy Industrial

Food Processing Plants
Chemical Plants
Bakeries
Cheese/Dairy Plants
Food and Beverage
Meat Processors
Packers

DCI work is 99% Dust Free

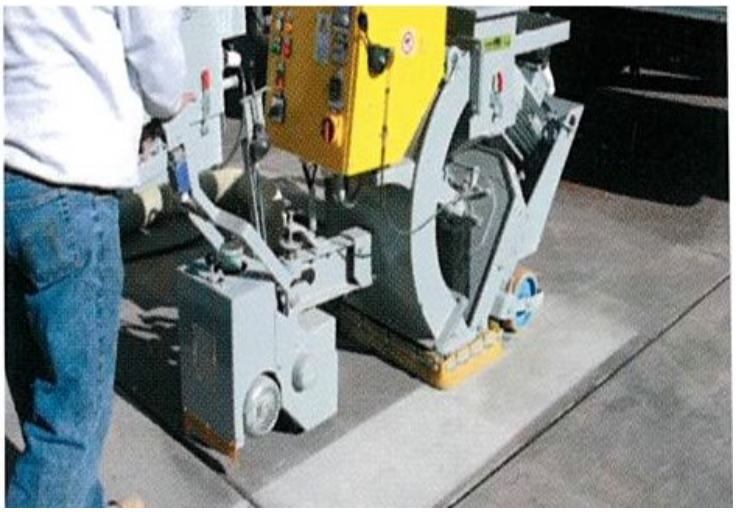

Special Features

- Any variety of textures and finishes can be incorporated using flake, quartz or sand of your choice providing a smooth, lightly non-skid to heavy non-skid decorative finish.
- Products can be troweled, screed, poured, squeegeed and rolled or brushed on.
- Most products are available with anti -microbial systems built in. All our products meet or exceed USDA/FDA requirements.
- Our polymer concretes (resin base) can be troweled up to 6 inches thick using 3/4" rock and 1/2" rebar.

Corrosion Control

Secondary Containment Areas
Battery Charging Areas
Tank and Trench Areas
Waste Water Areas
Pulp and Paper Plants
15 mil to 3/8" Systems

MMA's (Rapid Cure) Floors

- **Forklift traffic ready in 1 (one) hour**
- **Cures in as low as –15° F**
- **Freeze and thaw resistant**
- **Chemical resistant**
- **Meets or exceeds USDA/ FDA/OSHA requirements**

Commercial Flooring

Bakeries
Warehouses
Kitchens
Coolers/Freezers
Delicatessens
Public Works
Supermarkets
Retail Establishments
Schools

DCI's Planetary Grinder

Product Comparisons	Urethanes	Epoxies	MMAs	Vinyl Esters
Meets USDA/FDA standards	Yes	Yes	Yes	Yes
Cure times	5-12 hrs	12-36 hrs	1 hr	12-24 hrs
Hot/Cold Water	Up to 240F	160F	160F	160F
Moisture tolerance	Excellent	Fair	Fair	Fair
Moisture vapor transmission	12+ lbs/1000	3 lbs/1000	6 lbs/1000	5 lbs/1000
Over green concrete	7-10 days	28 days	28 days	28 days
Thermal shock resistance	Excellent	Fair	Excellent	Fair
Chemical resistance	Good	Excellent	Good	Excellent
Odor	None	Low	Yes	Yes

WATERPROOFING

Mezzanines
Upper Level Floors
Catwalks
Water Intrusion Areas
Restrooms
Kitchen Areas

www.dciflooring.com

877.225.2549